



PC-Security Kit Budget

- Easy use and installation
 - excellent price/performance ratio
 - Suitable for every office environment
- **Contents:** anti-theft cable with vinyl-mantle (2.5m), 2 Keys, 1 padlock, 4 adhesion pads

Order-No. – Packing Unit
19.08.3035 – 20


PC-Security Kit Budget

Notebook-Security Kit Budget

- Easy use and installation
 - excellent price/performance ratio
 - Suitable for every office environment
- **Contents:** anti-theft cable (4mm thick) with vinyl-mantle (1.5m), 2 Keys, 1 padlock, 2 adhesion pads

Order-No. – Packing Unit
19.08.3040 – 24

Notebook-Security Kit Budget

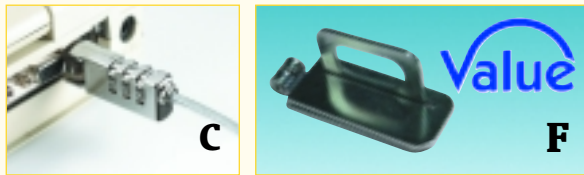

VALUE Notebook-Security Lock

- Easy use and installation
 - Excellent price/performance ratio
 - Suitable for every Notebook
- **Contents:** Anti-theft cable with transparent mantle (1.7m / 1.9m for 19.99.3015), Keys, 19.99.3015 has got a combination lock

Order-No. – Packing Unit

VALUE Notebook-Security Lock, COM Port	A	19.99.3005	– 50
VALUE Notebook-Security Lock, VGA Port	B	19.99.3010	– 50
VALUE Notebook-Security Lock, Screw	C	19.99.3015	– 50
VALUE Multiple Purpose Security Lock	D	19.99.3020	– 10
VALUE Multiple Purpose Security Lock	E	19.99.3021	– 50
VALUE Fixed base for Notebook Security Locks	F	19.99.3001	– 50










VALUE USB Battery Charger for 2AAA/2AA

- Battery Charger for Mignon (AA) oder Micro (AAA) batteries over the PC/Notebook/Hub USB-Port
- For NIMH or NICD Batteries
- **Green LED:** batteries full
- **Red LED:** loading
- Red blinking LED for error
- Max. two batteries can be loaded simultaneously

Order-No. – Packing Unit
19.99.2098 – 12

VALUE USB Battery Charger for 2AAA/2AA



PROTECTION CATEGORIES	ROLINE UPS	Serie ProSecure II (700VA – 3kVA)								
		Serie LineSecure (600VA – 1500VA) / DesignSecure (525VA – 825VA)								
		Protection Catégorie 3 – OFFLINE								
	Voltage Problem									
		Power failure	Power sag	Power surge	Under voltage	Over voltage	Switch transient	Line noise	Frequency variation	Harmonic distortion
	Protection Categories	Protection Catégorie 9 – ONLINE								
		Protection Catégorie 5 – LINE INTERACTIVE								
		Protection Catégorie 3 – OFFLINE								

3-5-9

The easiest way to your UPS!

The proven 3-5-9 Voltage Protection Concept, is focussed on the nine protection categories. Based on those 9 categories, you can choose the right UPS for your environment.

3 Offline UPS

- Single workstation
- Home or small office use
- Cash point systems

Those UPS are especially designed for desktop use, small, quiet and compact. These UPS protect against:

- Power failure
- Power sag
- Power surge

5 Line Interactiv UPS

- Office and department Servers
- LAN Systems

Those UPS are especially designed for middle sized offices. These UPS protect against:

- Power failure
- Power sag
- Power surge
- Under Voltage
- Over Voltage

9 Online UPS

- Server with attached Databases
- Computer centres
- WEB hosting systems

These UPS are especially designed for big sized offices. These UPS protect against:

- Power failure
- Power sag
- Power surge
- Under Voltage
- Over Voltage
- Switch transient
- Line noise
- Frequency variation
- Harmonic distortion

VALUE UPS

- Quality Protection for Small Servers, Workstation & PC
- Line interactive UPS
- Boost and buck AVR (Auto voltage regulation)
- Fully digitized microprocessor controlled
- Energy saving function (UPS green mode)
- 50/60Hz frequency auto sensing and selection
- Cold start function (DC power on)
- Lightning and surge protection
- Short circuit and overload protection
- Advanced battery management (ABM technology)


- Tel/Modem internet surge suppression
- Smart RS-232 communication port
- Automatically charging when UPS off
- History record of power failure events
- Back up, on-line, battery status, power status display by software
- Schedule shutdown & reboot
- Dimension: 97x135x260 (19.99.3404) and 97x135x320 (19.99.3406/3408)
- Backup Time: 5min (19.99.3404/3406) and 8min (19.99.3408)

Order-No. – Packing Unit

VALUE UPS, 400VA	19.99.3404 – 3
VALUE UPS, 600VA	19.99.3406 – 3
VALUE UPS, 800VA	19.99.3408 – 3




Description	Capacity (VA/W)	Back up time (Min.)	Dimensions (mm)	Weight (kg)	Order-No. – Packing unit
VALUE UPS 400	400 / 280	5	97x135x260	6	19.99.3404 – 3
VALUE UPS 600	600 / 420	5	97x135x320	7	19.99.3406 – 3
VALUE UPS 800	800 / 550	8	97x135x320	7	19.99.3408 – 3

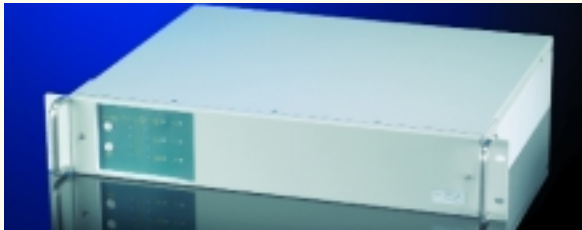

ROLINE Line Secure

LineSecure UPS's work with the „buck & boost“ line interactive technology; used when reliable protection against strong voltage fluctuations is essential. Protect against: power failure, power sag, power surge, under voltage, over voltage.

Product features:

- Compact, quiet, user friendly
- Desktop and 19" RM models
- Short circuit and overload protection
- AVR (Automatic Voltage Regulation)

- ABM (Automatic Battery Management) increases battery life up to 50%
- Telephone/Modem connections
- Shutdown software including License for 1 server
- Serial Port for advanced Power Management Software (incl. in content of delivery)

- **Content:** UPS, Cable set, Software CD

	Order-No. – Packing Unit
LineSecure 500	19.40.1105 – 1
LineSecure 700	19.40.1107 – 1
LineSecure1000	19.40.1110 – 1
LineSecure1500	19.40.1115 – 1
LineSecure 1000R	19.40.1111 – 1
LineSecure 1500R	19.40.1116 – 1

Model	Capacity	Back up Time	Dimension (WxDxH)	Weight
RU-LS500	500VA / 350W	5 Min.	97x320x135 mm	6.2 kg
RU-LS700	700VA / 490W	7 Min.	97x320x135 mm	6.7 kg
RU-LS1000	1000VA / 670W	3 Min.	140x436x210 mm	15 kg
RU-LS1500	1500VA / 960W	3 Min.	170x450x226 mm	29 kg
19" – Rackmount				
RU-LS1000R2	1000VA / 670W	3 Min.	438x380x84 mm (2U)	20 kg
RU-LS1500R3	1500VA / 960W	3 Min.	438x380x130 mm (3U)	25 kg

ROLINE Pro Secure


The ROLINE ProSecure Series – for optimum power protection is a truly state of the art on-line double conversion UPS, ideal for all essential computer systems and servers. Protects against: power failure, power sag, power surge, under voltage, over voltage, switch transient, line noise, frequency variation, harmonic distortion.

Product features:

- Desktop and 19" RM models

- Short circuit and overload protection
- AVR (Automatic Voltage Regulation)
- ABM (Automatic Battery Management) increases battery life up to 50%
- Telephone/Modem connections
- Shutdown software including License for 1 server
- Serial Port for advanced Power Management Software (incl. in content of delivery)
- SNMP capability

	Order-No. – Packing Unit
ProSecure II 700	19.40.1081 – 1
ProSecure II 1000	19.40.1082 – 1
ProSecure II 1500	19.40.1083 – 1
ProSecure II 2000	19.40.1084 – 1
ProSecure II 3000	19.40.1085 – 1
ProSecure II 700 RM1U	19.40.1086 – 1
ProSecure II 1000 RM1U	19.40.1087 – 1
ProSecure II 700 RM2U	19.40.1088 – 1
ProSecure II 1000 RM2U	19.40.1089 – 1
ProSecure II 1500 RM2U	19.40.1090 – 1
ProSecure II 2000 RM2U	19.40.1091 – 1
ProSecure II 3000 RM2U	19.40.1092 – 1

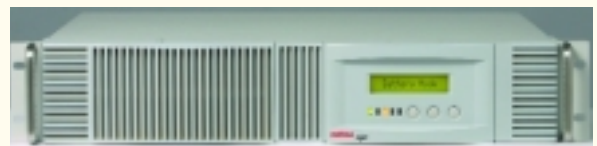

Model	Capacity	Back up Time	Dimension (WxDxH)	Weight
RU-PS700	700VA / 490W	5 Min.	155x410x235 mm	15 kg
RU-PS1000	1000VA / 700W	6 Min.	155x410x235 mm	16 kg
RU-PS1500	1500VA / 1050W	5 Min.	155x410x235 mm	20 kg
RU-PS/2000	2000VA / 1400W	6 Min.	215x405x365 mm	31 kg
RU-PS3000	3000VA / 2100W	5 Min.	215x405x365 mm	37 kg
19" – Rackmount (1U)				
RU-PS700R1	700VA / 490W	6 Min.	428x610x44 mm – 1U	16 kg
RU-PS1000R1	1000VA / 700W	5 Min.	428x610x44 mm – 1U	16 kg
19" – Rackmount (2U)				
RU-PS700R2	700VA / 490W	5 Min.	428x425x88 mm – 2U	16 kg
RU-PS1000R2	1000VA / 700W	6 Min.	428x425x88 mm – 2U	17 kg
RU-PS1500R2	1500VA / 1050W	5 Min.	428x425x88 mm – 2U	18 kg
RU-PS/2000R2	2000VA / 1400W	6 Min.	428x610x88 mm – 2U	32 kg
RU-PS/3000R2	3000VA / 2100W	5 Min.	428x610x88 mm – 2U	33 kg

roline[®]
Designed for Professionals



Highlight


ROLINE DesignSecure UPS

- Compact designed UPS in futuristic design
- For Workstations and PCs
- LineInteractive UPS
- AVR (Automatic Voltage Regulation)
- Digital status display
- Integrated overvoltage protection
- Telephone/Modem connections
- USB Port for advanced Power Management Software (incl. in content of delivery)
- EMI/RFI Noise Filter
- Dimensions (HxLxW) 168 x 105 x 334 mm
- Weight: 6.3 kg
- Backup Time: up to 4 Minutes
- **Content:** UPS, Cable set, Software CD

ROLINE DesignSecure UPS, 525VA, 315W
Order-No.-Packing unit 19.40.1205-1

ROLINE DesignSecure UPS, 625VA, 375W
Order-No.-Packing unit 19.40.1206-1

ROLINE DesignSecure UPS, 825VA, 495W
Order-No.-Packing unit 19.40.1208-1

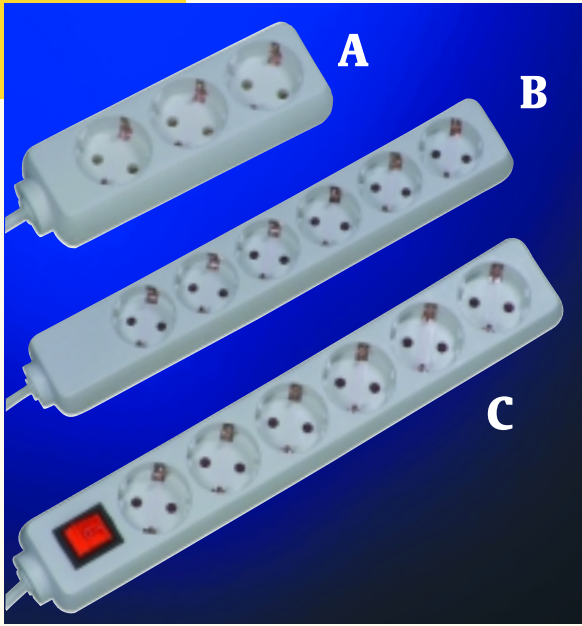

VALUE Powerbar 3/6 – Ways

- 3/6 – Way power bar in plastic housing
- 6 – Way power bar with integrated Child protection
- Convenient right angle plug
- **Colour:** white
- Length: 1.4m
- **Test symbol**



			Order-No. – Packing Unit
VALUE Powerbar 3-Way	A	1.4m	19.07.1113 – 1
VALUE Powerbar 6-Way	B	1.4m	19.07.1116 – 1
VALUE Powerbar 6-Way, switched	C	1.4m	19.07.1126 – 1



ROLINE Power Strip

- 6 AC Outlets with Children Safety Shutters
- 5 Standard Sockets Plus 1 "Block space" Socket
- Convenient Right Angle Plug
- Length: 1.8m
- Surge Protection with EMI/RFI noise filter (19.07.1605)
- 10 A resettable Circuit Breaker (19.01.1610)
- Master/Slave function (19.01.1610): Plug into the master socket outlet the leading equipment eg. the PC. Connect to the slave outlets your other equipment's as eg. printer, monitor, scanner. If you switch on your main

equipment connected to the master socket outlet, the slave equipment will be automatically supplied and vice versa.



		Order-No. – Packing Unit
ROLINE Powerbar 6-Way	A	19.07.1600 – 20
ROLINE Powerbar 6-Way, Surge Protect	A	19.07.1605 – 20
ROLINE Powerbar 6-Way, Master-Slave	B	19.07.1610 – 20



Universal Car/Air Power Adapter

- The Universal Car/Air Adapter allows notebook users to power and charge their notebooks easily while travelling in a car or on an airplane.
- Protects against:
 - Over-Current
 - Short circuit with automatic recovery
 - Internal over temperature shut down
 - Automatic recovery for shut down condition
- **19.99.2006/2010** with plug for alternating current
- **19.99.2007/2009** with plug for Car/Airplane cigarette lighter
- Output Voltage is customizable over different colour encoded adapter (15, 16, 18, 19, 20V)
- **Contents:** Adapter with different notebook adapter plugs, Manual, colour encoded adapters for output voltage regulation

Technical Data:	19.99.2006	19.99.2010	19.99.2007	19.99.2009
Power output:	65W	90W	72W	90W
Weight:	270g	400g	130g	130g
Dimensions:	220x57x34mm	145x60x30mm	95x42x21mm	95x42x21mm

		Order-No. – Packing Unit
VALUE Energy Notebook Power Adapter 65W	A	19.99.2006 – 3
VALUE Energy Notebook Power Adapter 90W	A	19.99.2010 – 3
VALUE Energy Car/Air Power Adapter 72W	B	19.99.2007 – 3
VALUE Energy Car/Air Power Adapter 90W	B	19.99.2009 – 3